

To change the facia you need a t6 screw driver, a small philips, and a pair of tweasers + the important case opening tool/credit card/plectrum etc

1) Remove the stylus, battery cover , battery ,sim and antenna gromet

Gently prise up the antenna cover at the corners where it would meet the battery cover with a small flat blade(it will fold up like a car bonnet!)



2) Remove the 2 screws holding the antenna in and carefully fold it up in (from top of the phone towards the battery end , the end nearest the battery is very tight but will come out if you are carefull



3) Remove the 2 screws at the bottom of the phone (usb end) and then carefully prise the phone open with you plastic case opening tool or suitable alt.. starting half way down the side with the power button and around the top and down other side until the case opens.. NOW CAREFULLY LIFT THE BACK COVER AWAY FROM THE FRONT AND NOTE THE SHORT S PEAKER CABLE, USE YOU TWEASERS TO CAREFULLY DISCONNECT IT



4) Unscrew the motherboard and switch plate , disconnect the small ribbon cable to the switches




fold the motherboard over (to expose the screen at 90deg to the screen cable) and remove the switchboard and buttons

5) The screen is just clipped and folds out from the bottom of the phone to the top



6) Move the vibra motor, buttons and speaker (keep the speaker in the same position ie dont turn it! so the connectons line up) in to the new facia

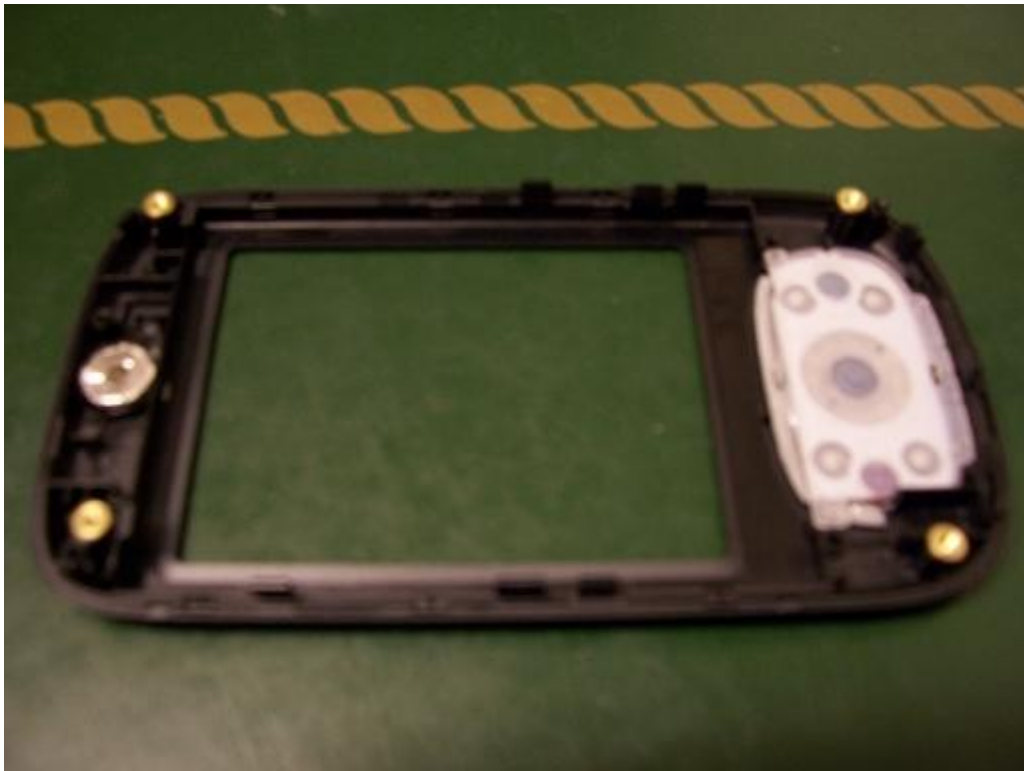

7) carefully rebuild in the reverse order and test.

Just go slowly and make sure you ground your self to get the static out of you before you start and dont force anything..

and it works 100% then I put the imate rom on

